

PVC FOAM BOARD




PRODUCT DATA SHEET

PVC Foam Board is a cost-effective closed-cell PVC foam specially formulated to provide high physical properties and be recyclable. Engineered for easy workability, weatherproof and insulation properties, and excellent fire behavior. It is characterized for its phenomenal screw retention and amazing resistance to moisture; it will not rot, mold or mildew. It is also compatible with multiple resins and adhesives.

PVC Foam Board is a stand-alone product and can be used without skins as a replacement for wood and plywood. This PVC foam has excellent fastener pullout strength and high flexural strength and stiffness.

PROCESSING

- Adhesive bonding
- Prepreg processing
- Contact Molding (hand/spray)
- Compression molding (GMT, SMC)
- Resin infusion / injection (VARTM / RTM)

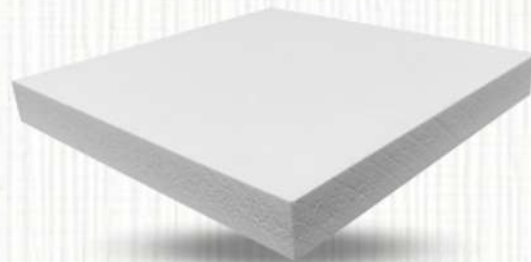

APPLICATIONS

Marine: Transom Boards, Consoles, Seat Bottoms, Decks, Floors, Bulkheads, Stringers, Superstructures, Engine Beds, Interiors, Local Reinforcements, Tooling and Molds

Transportation: Primary Body Structure, Interior Panels, Sidewalls, Floors, Roofs and Engine Covers

Construction: Decks, Roof Panels, Doors, Windows, Cabinets, Tables and Architectural Panels

Industrial: Covers, Containers, Refrigeration, Tanks,

Local Reinforcements, Sporting goods, Tooling and Molds

Signs: Outdoor Displays, Dimensional Lettering, Dimensional Signs and Channel Letter Backer



Jay Mondal, PhD

Advanced Performance Materials LLC

Email: jay@advancedmaterialsus.com

Phone: +1 929 476 3870

TEST STANDARDS		Units (metric)	VALUES
Density	ASTM C271	Kg. / m ³	450
Compressive Strength	ASTM D1621	MPa	5,84
Compressive Modulus	ASTM D1621-B	MPa	2,92
Tensile Strength	ASTM C297	MPa	3,32
Shear Strength	ASTM C273	MPa	3,07
Shear Modulus	ASTM C273	MPa	38,05
Shear Elongation at Break	ISO 1922	%	1.404
Flexural Strength	ASTM D790	MPa	12,40
Peel Strength	ASTM D1062	Kg./m	11,76
Screw Torque		N·m	2,28
Screw Pull		Kg.	102,60
Standard Sheet	Length	mm	2440
	Width	mm	1220
	Thickness	mm	6,35 to 50,80

Values shown are nominal average determined from independent laboratory and house testing. Tests are perpendicular to the plane.

Processing temperature:	< 94 °C
Water Absorption:	< 1%
Density Tolerance:	+ / - 10%
Color:	White