



Natural Graphite

Technical Specification

Purity: 97-99.99% (custom purification based on end-user need)

Particle size:

D30- 400 micron (Can be customized)

D50- 300 micron (Can be customized)

D90- 250 micron (Can be customized)


Ash content: <0.002%

Impurity: <100 ppm (custom purification)

Moisture content: <0.005%

Purification process: Froth flotation (sustainable), Thermal.

Application: Battery, atomic energy, lubricant, coating, flame retardant, engineered materials

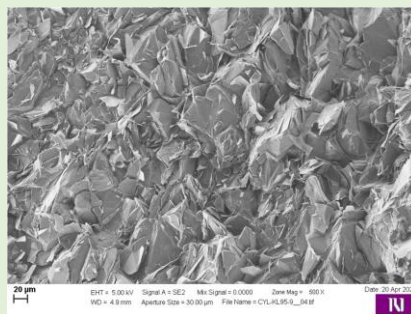

Contact:

Jay Mondal, PhD (CTO)

Advanced Performance Materials LLC

Email: jay@advancedmaterialsus.com

Phone: +1 929 476 3878

Advanced Performance Materials LLC
66 West Flagler Street, Floor 9, Suite 900, Miami, FL 33130
Email: contact@advancedmaterialsus.com